Peavey® International Series™ II

We appreciate your purchase of Peavey drums! It is our wish that you experience the joy of music while playing your new kit.

Assembled Drum Kit

The drum kit consists of:
12 inch x 10 inch Tom with 12 lugs
13 inch x 11 inch Tom with 12 lugs
16 inch x 16 inch Floor Tom with 12 lugs
22 inch x 14 inch Bass Drum with 16 lugs
14 inch x 6.5 inch Metal Snare Drum with 6 lugs (chrome finish)
1 Cymbal Stand (double-braced)
1 Hi-Hat Stand (double-braced)
1 Snare Stand (double-braced)
1 Drum Throne (single-braced)
1 Bass Drum Pedal
1 Pair of 14 inch Hi-Hat Cymbals
1 18 inch Crash Ride Cymbal
1 Pair of Drum Sticks
1 Drum key(wrench). NOTE: No other tools are necessary.

If you have any questions concerning assembly or parts please contact the dealer or Peavey Customer Service, Ph 877-732-8391

I. Unpacking

Make sure that you receive 2 cartons. One labeled 1/2 and the other labeled 2/2.
Open carton labeled 1/2.

Remove the bass drum heads and 16” tom heads(**A**) and set to the side.
Remove the rest of the contents: 12” tom, 16” tom, bass drum, and drum throne seat(**B**).

A

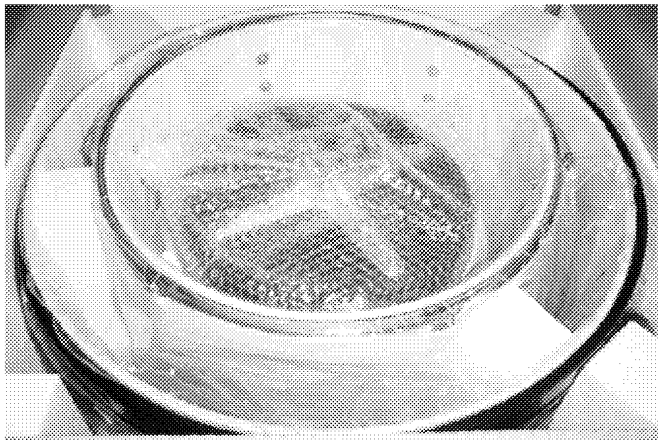

B

Open carton labeled 2/2. Remove the top box that contains the cymbals. There is no need to open it yet.

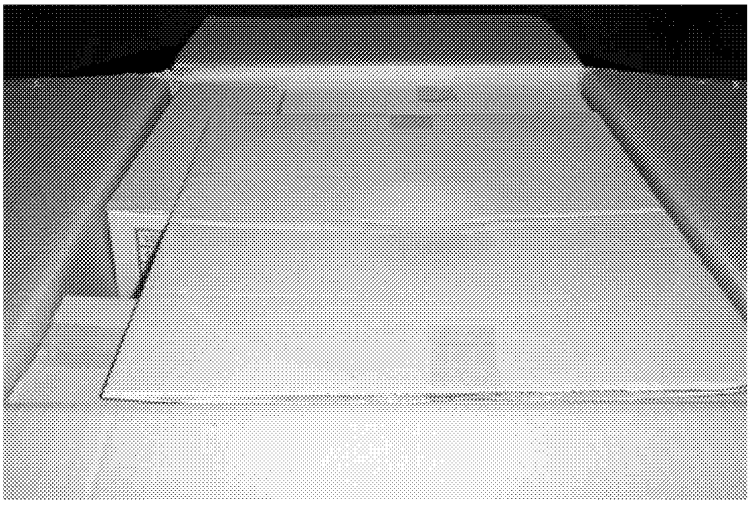

Remove longest box under the cymbals and open. This box contains the tom lugs, 16” tom legs, bass drum lugs and hoop clamps, tom arms, and 1 pair of drumsticks. Open this box and find the bag that has the bass drum hardware (rim claws, lugbolts, washers, and drum key).

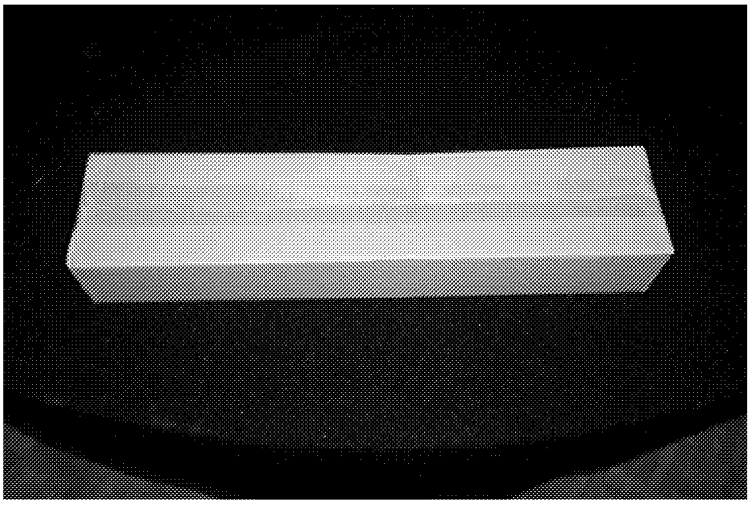

II. Assembly

Take the plastic protective bag from the bass drum (the largest drum) and place in front of you with the tom mount facing you and the Peavey logo upside down.

Get the bass drum heads that were in box 1/1. Find the clear bass drum head with the black Peavey logo. Take the clear bass drum head and place on top of the bass drum making sure to align the Peavey logo parallel with the tom mount.

Take one of the bass drum hoops, remove the protective plastic wrap, and line up the seam in the PVC covering to the bottom (opposite end from the tom mounts). Take 8 hoop clamps and line them up with the lugs on the bass drum.

Place a washer onto the lug bolt and insert through the hoop clamp into the lug and screw it down finger tight only. Continue this all the way around the bass drum. Then, taking the drum key tighten each lug a couple of turns. Make sure to tighten one then go to the opposite side to tighten the next rather than going around in a circle. We have an informative guide to drum tuning on the web at the following address: http://www.peavey.com/media/pdf/misc/drumtuning.pdf

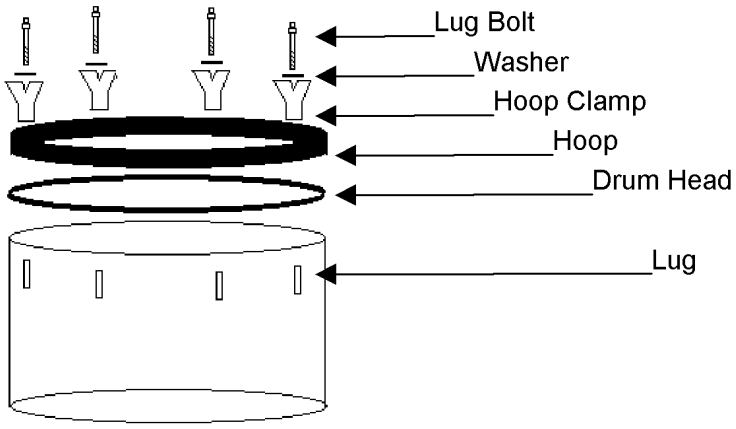

Take the black bass drumhead and line up the Peavey logo straight across the top of the bass drum. Repeat the above steps for this side of the bass drum in order to put the front head on.

Find the box labeled pedal and remove the contents. Remove the plastic protective wrap. Insert the beater into the top of the pedal and tighten. Insert the pedal stabilizer by squeezing it together and inserting the prong into the hole at the base of the pedal.

Locate the 16” tom shell. Find the Peavey logo and orient it face up toward you. Remove the two rims (held on by two lug bolts). Find the two 16" heads and place one on top of the shell. Take one of the rims and place it on top of the head being sure to line up the lug bolt holes with the lugs. Take 6 lug bolts and 6 washers and tighten them down finger tight. As with the bass drum, tighten them down with the drum key to the desired pitch by going across not around to tune. Flip the tom over and repeat the head installation process.

Locate the hardware box that had the lug bolts and remove the three 16” tom legs and insert into the holders on the tom. Position the tom legs with the rubber feet away from the tom. This provides stability.

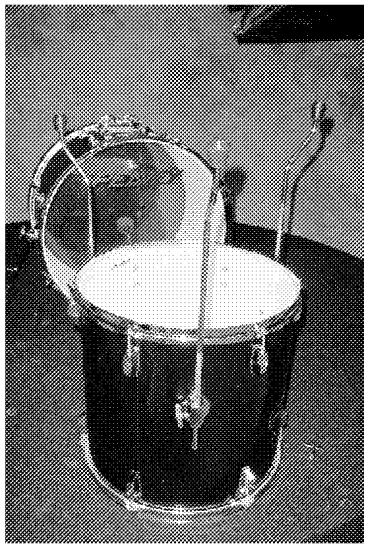

Take the two tom arms out of the hardware box and insert them into the top of the bass drum. Make sure that the adjustment key for the arm is to the outside and not together in the middle.

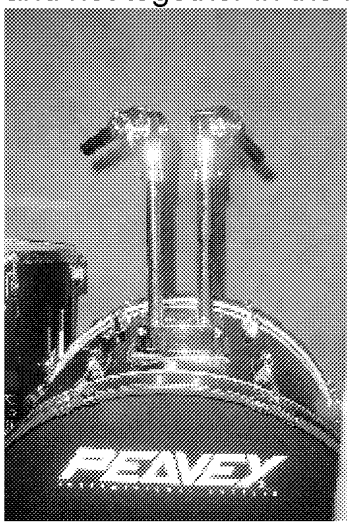

Take the 12” and 14” toms and mount them to the tom arms.

Find the snare stand and assemble.

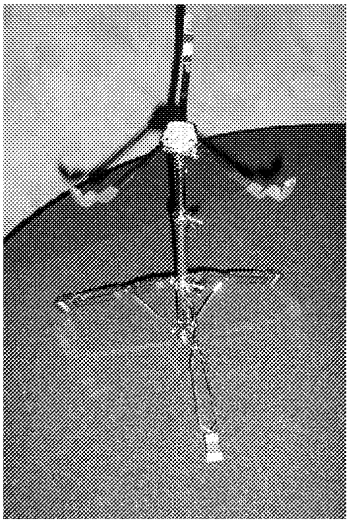

Place the snare on top of the stand with the moveable arm to the front of the snare. This is the stabilizer arm and can be tightened to hold the snare firm in the stand.

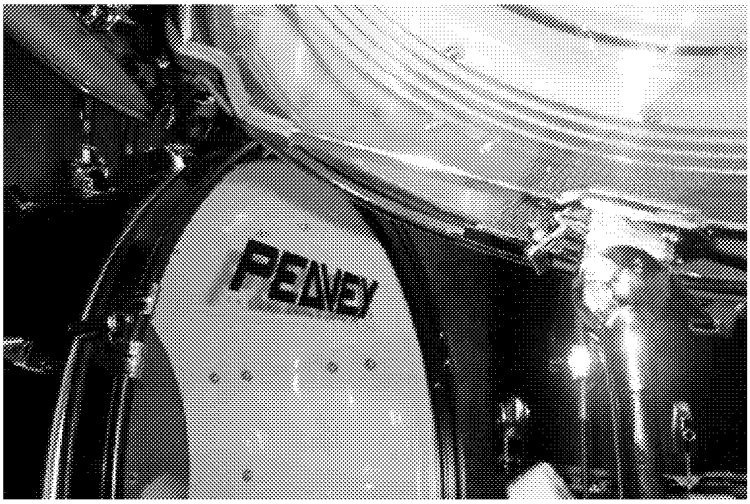

Remove the high hat stand from the stand box and assemble. Place the pole into the top fitting and tighten down. Loosen the screw on the legs and extend them out. Place the support arms into the holes at the base of the stand by squeezing together and inserting them into place.

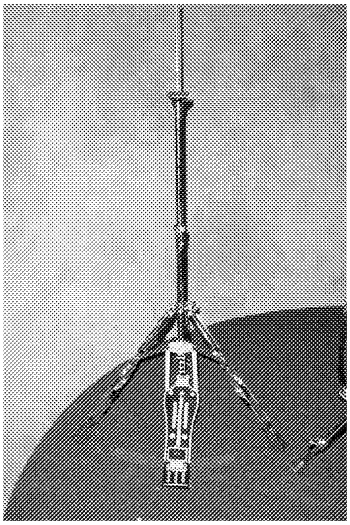

Remove the high hat clutch from the top of the stand and place one high hat cymbal (one of the two smaller cymbals) on the felt pad at the base.

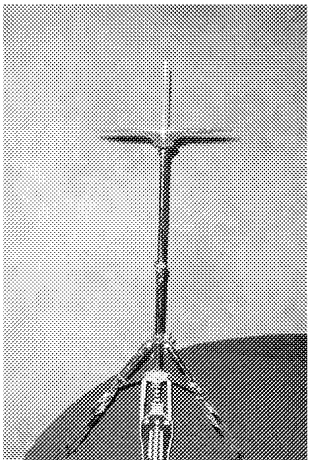

To install the clutch onto the other cymbal remove the small thin nut and remove it as well as the washer and one of the two pieces of felt. Slide the high hat cymbal onto the clutch and replace the other felt, washer, and nut. Tighten finger tight.

Assemble the cymbal stand by placing the top tube into the tube with legs and tightening the screw. Extend the legs so the stand is stable. Remove the wing nut from the top of the stand along with the washer and felt and place the cymbal on the stand. Replace the felt the washer then finger tighten the wing nut.

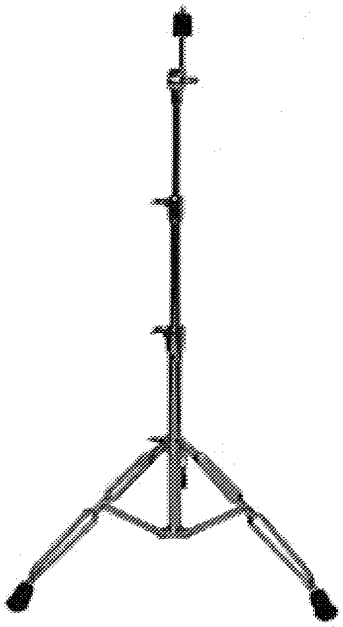

Find the drum throne (seat and stand) and remove plastic bags. Insert the tube into the base and make sure that the screw is seated in the grooves, then finger tighten. Take the seat and place on the top tube making sure that it is seated all the way down. Finger tighten the nut and wing nut.

Set up for right hand drummers

Set up for left hand drummers